

FIG. 1

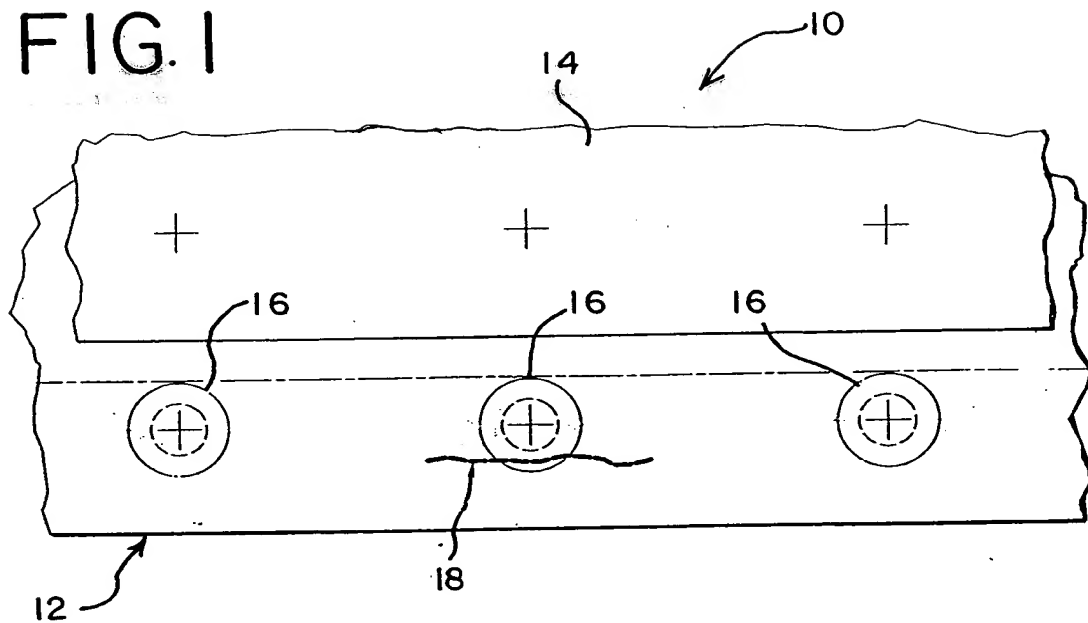


FIG. 2

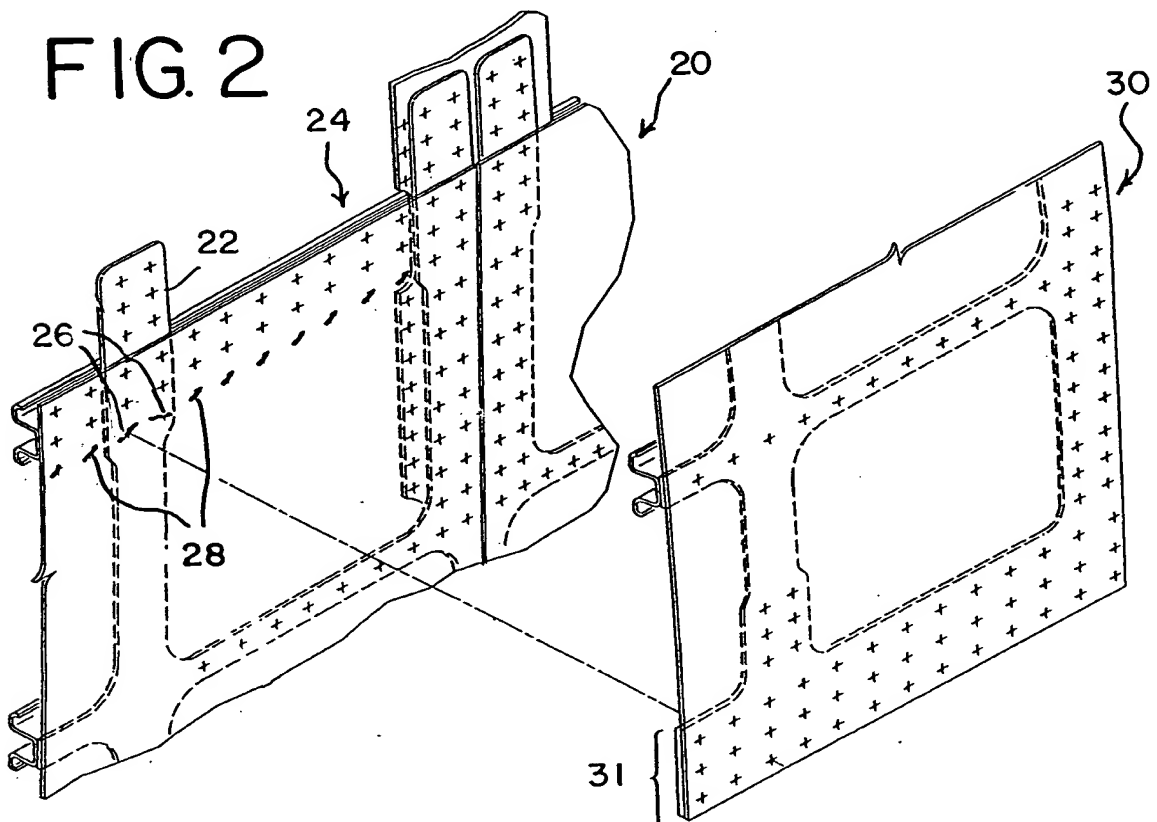


FIG. 3

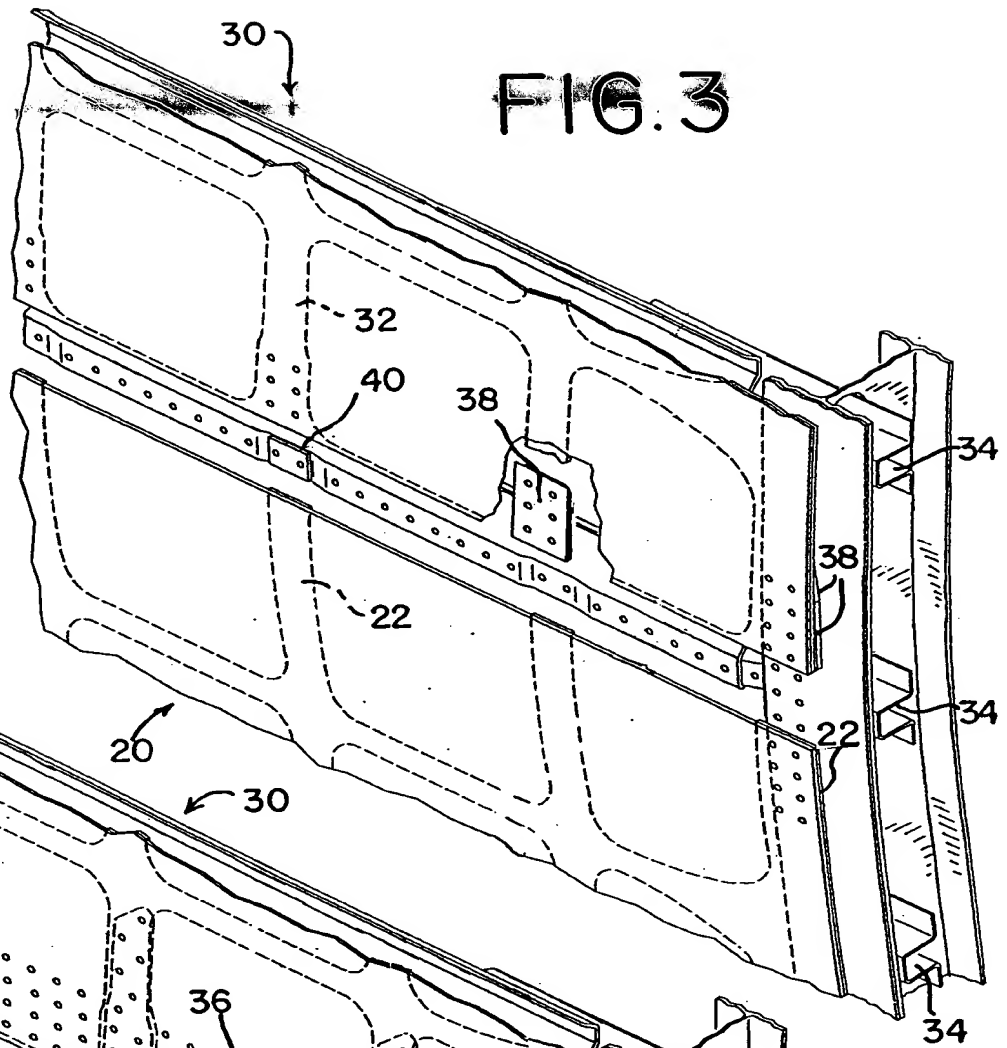


FIG. 4

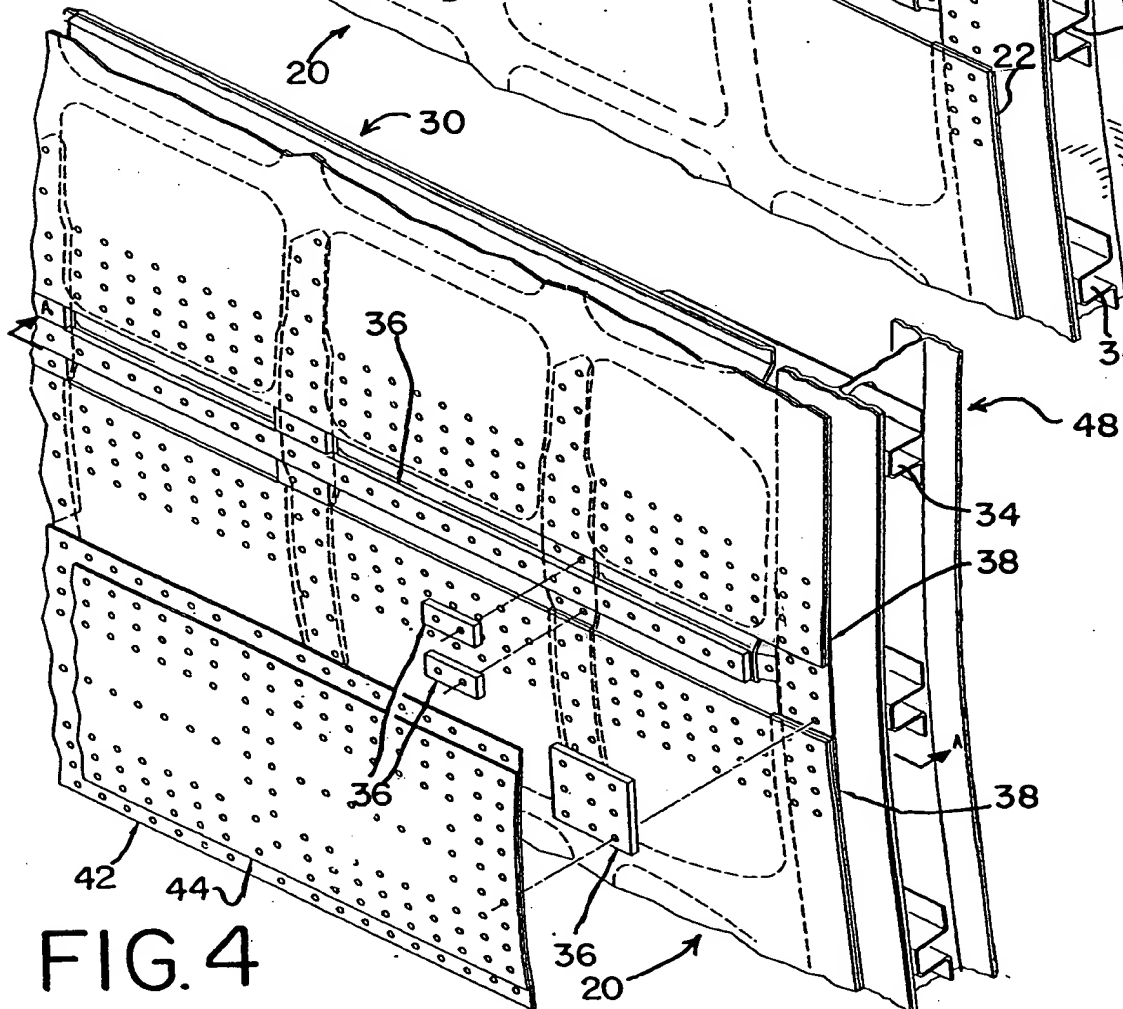


FIG. 5

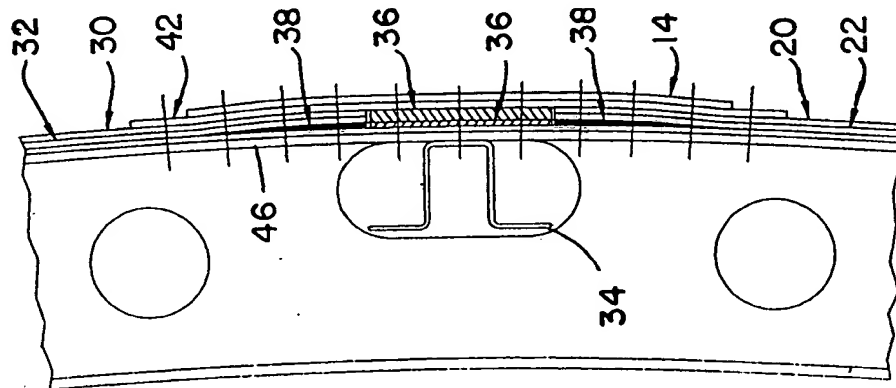


FIG. 6

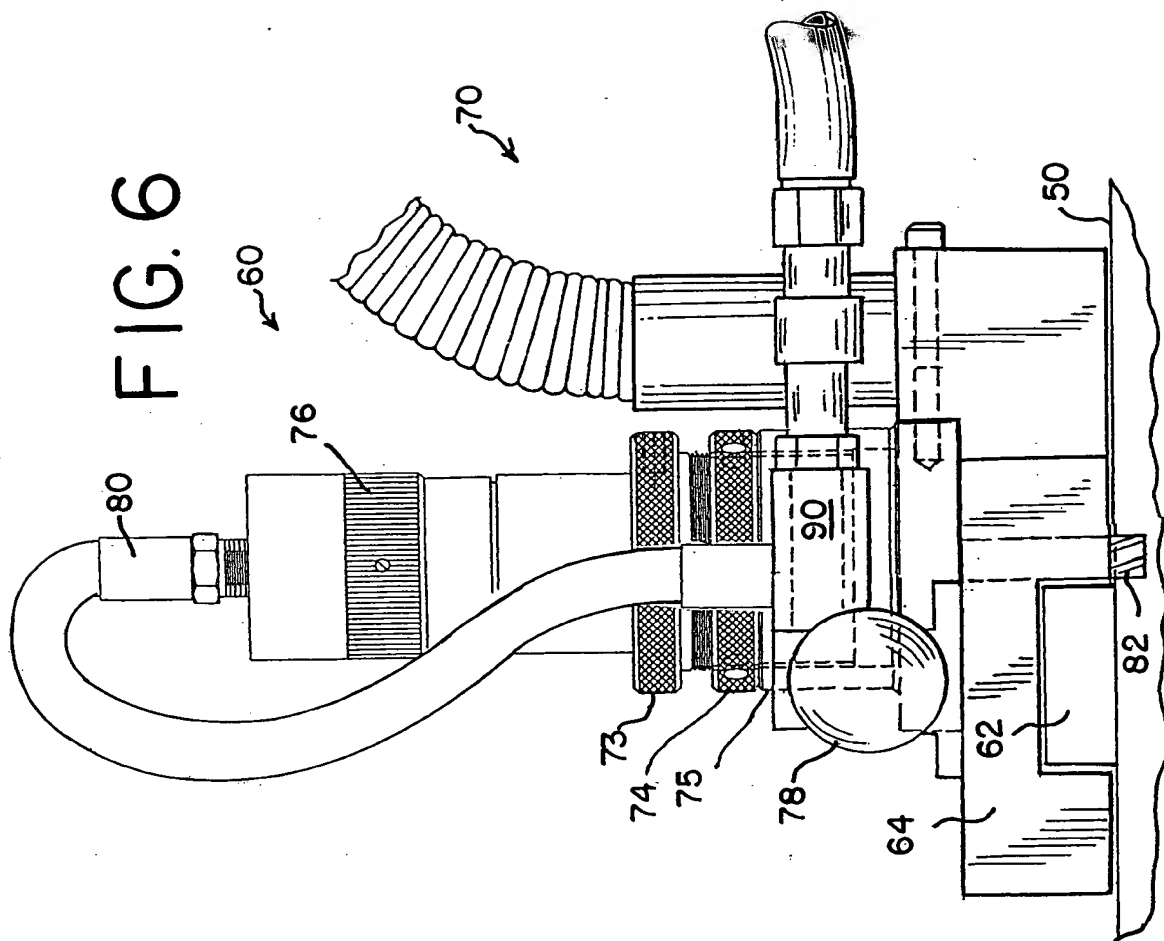


FIG. 7

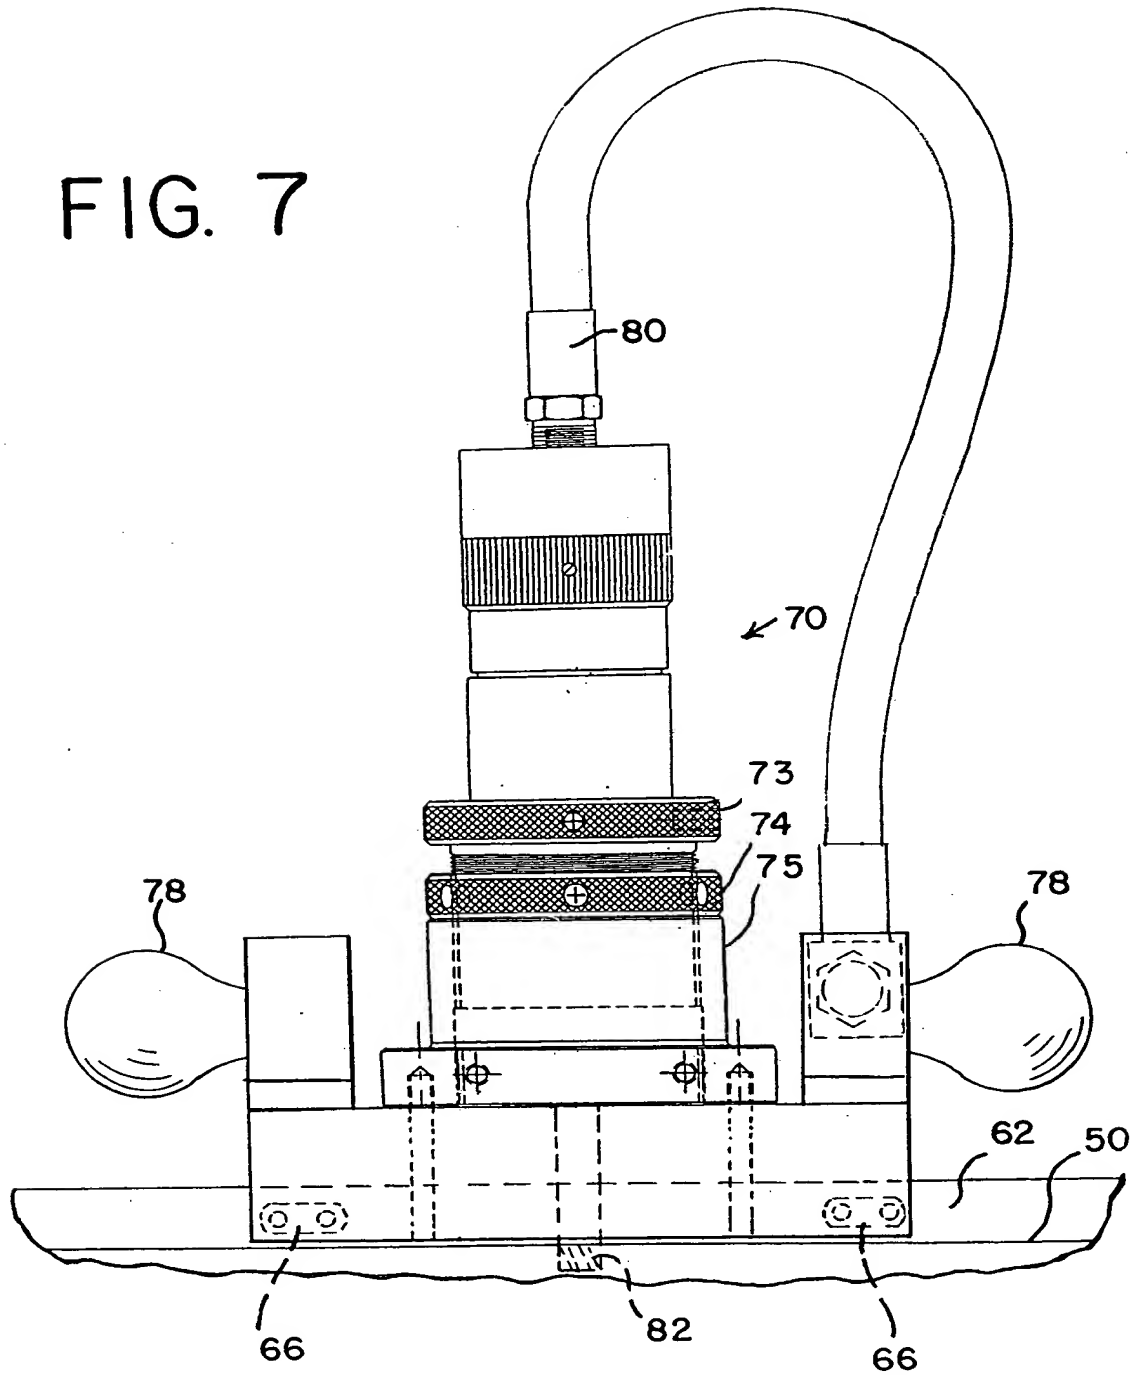


FIG. 8 is a perspective view of a device 60 mounted on a substrate 50. The device 60 includes a main body 70 with a cylindrical component 78 and a flexible hose 80. A gas cylinder 92 is connected to the device via a hose 84 and a valve assembly 86. The device is secured to the substrate 50 by a bracket 62 and a fastener 64. The substrate 50 has a series of holes 58 and a recessed area 66.

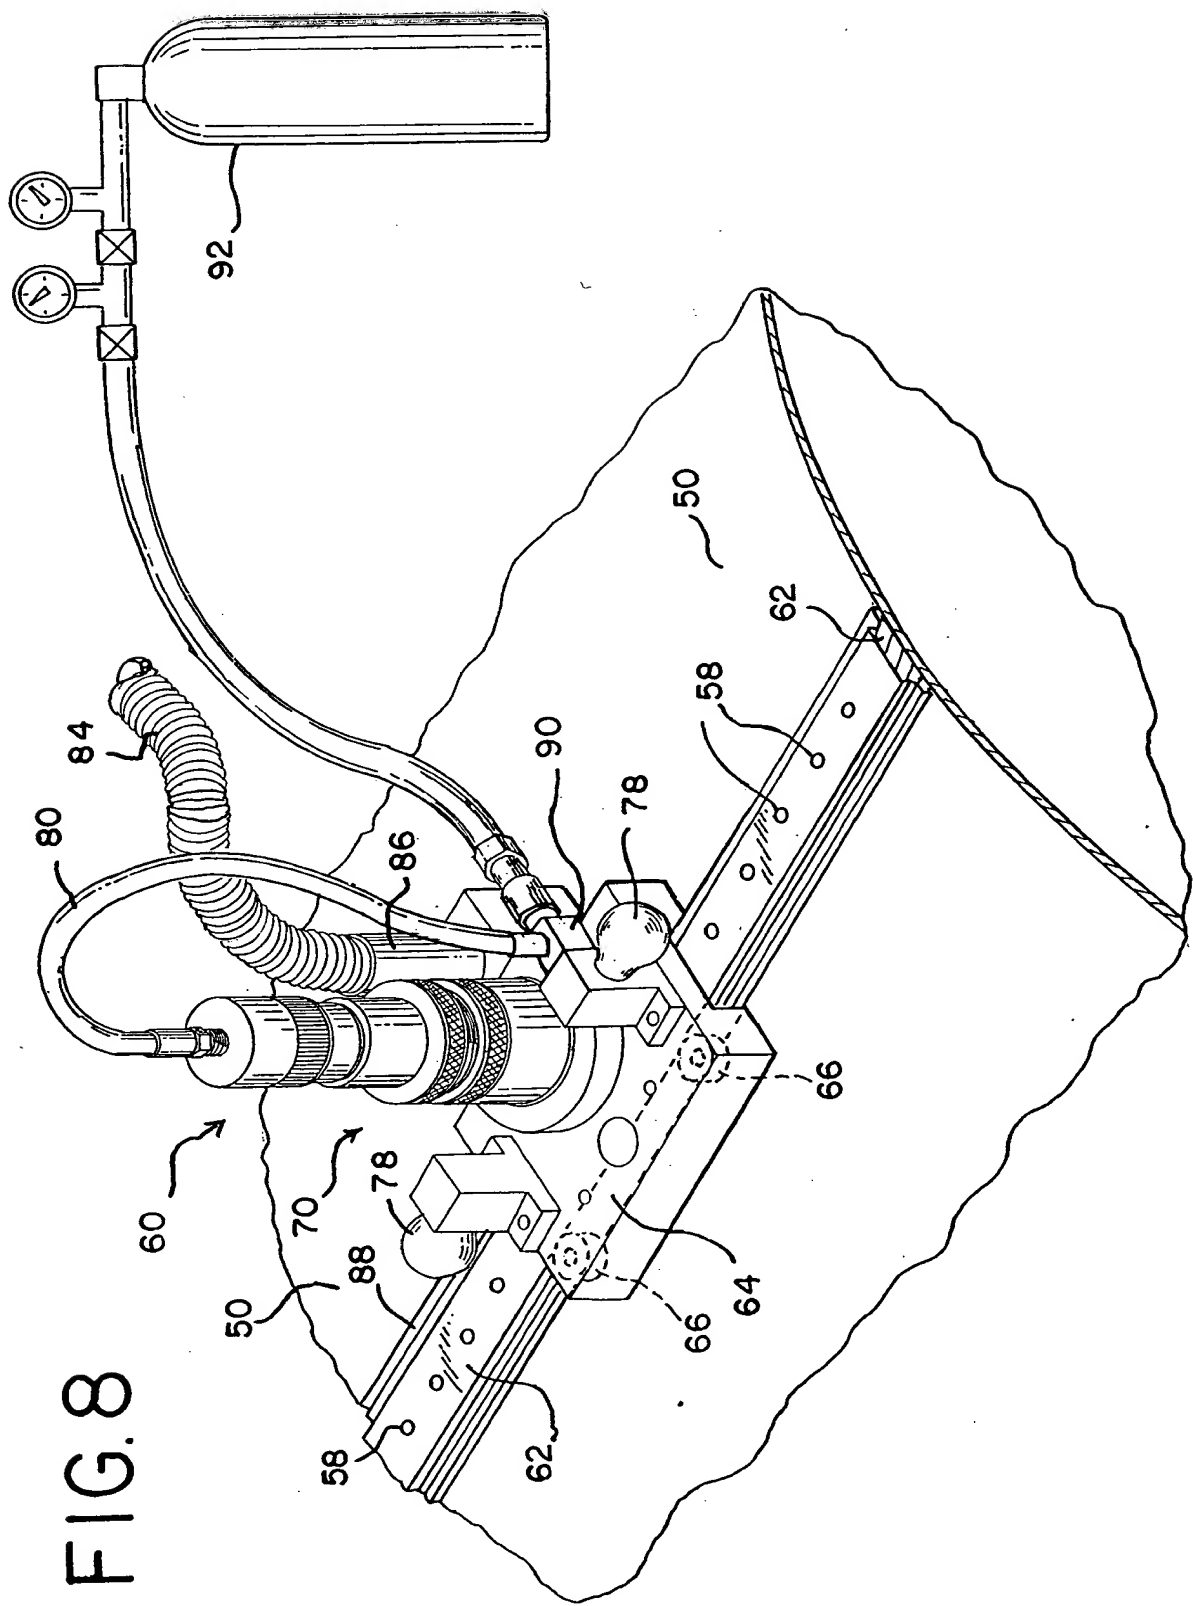


FIG. 9a
PRIOR ART

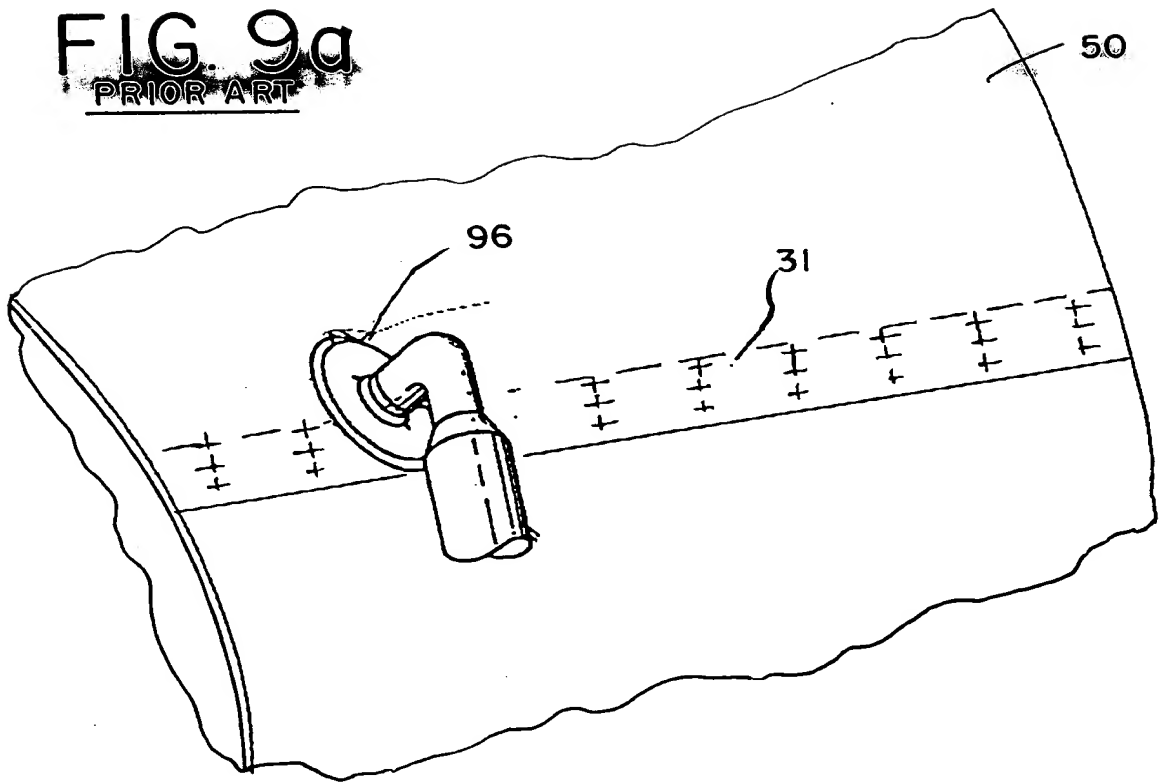


FIG. 9b
PRIOR ART

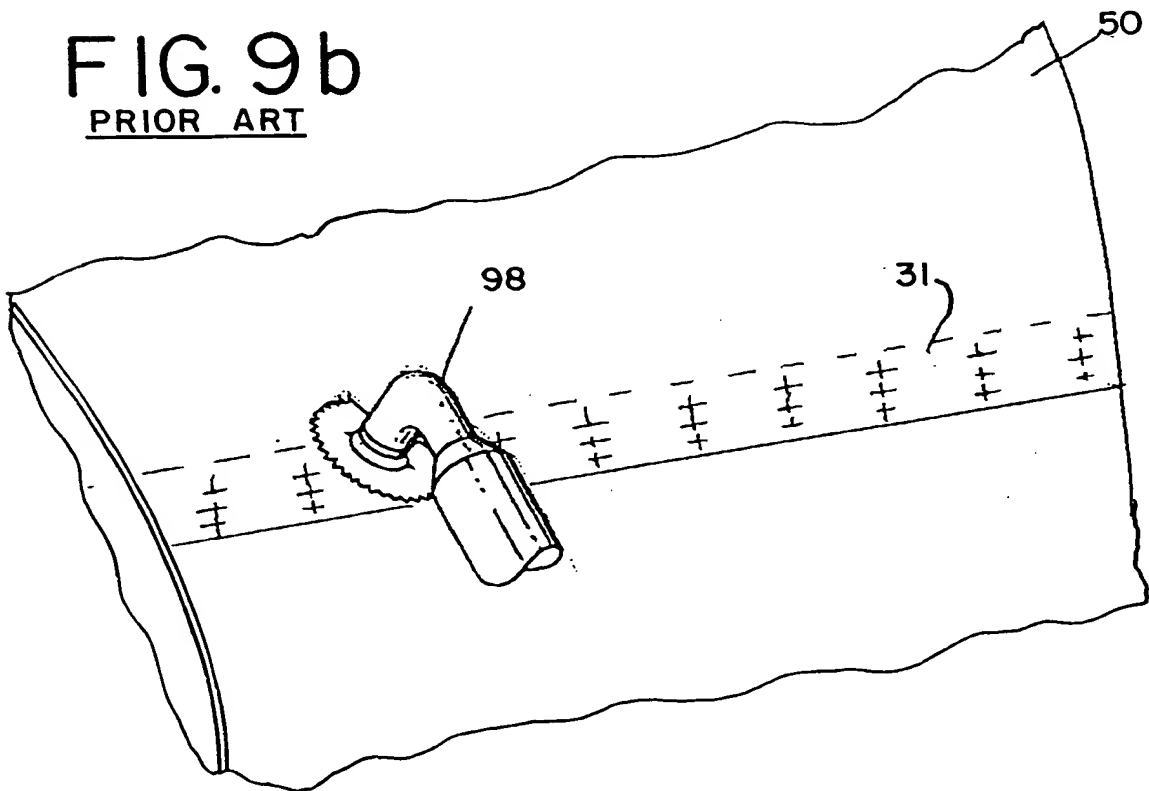


Fig. 10

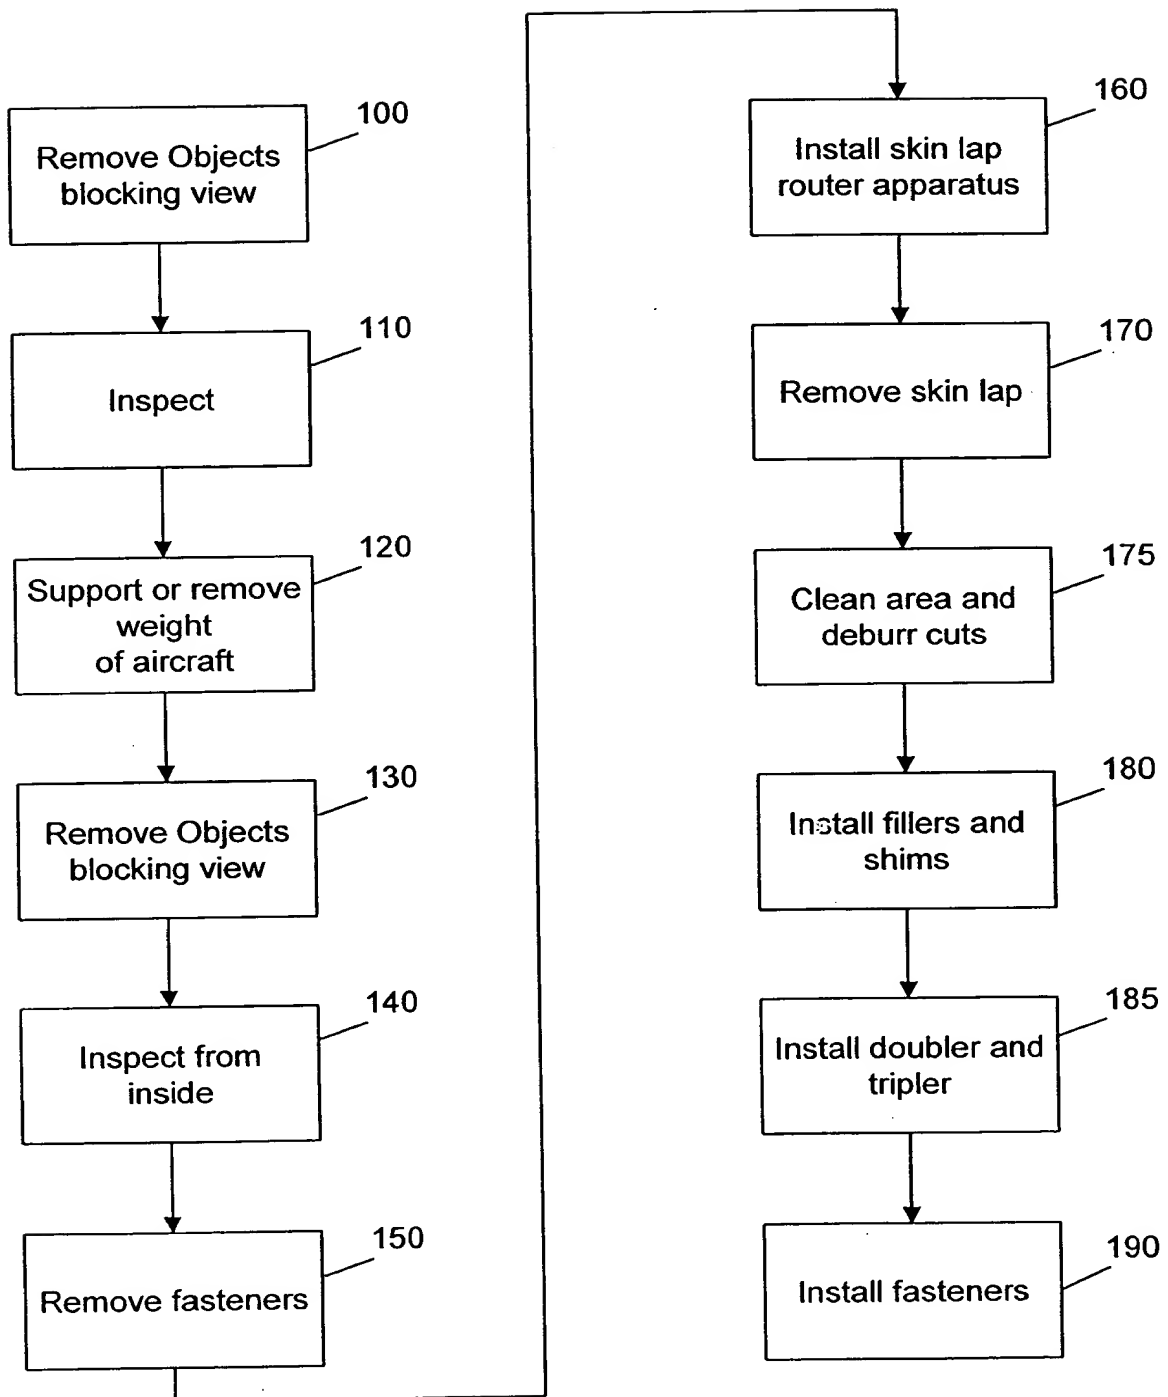


Fig. 11

